

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
7 August 2003 (07.08.2003)

PCT

(10) International Publication Number  
WO 03/065535 A1

- (51) International Patent Classification<sup>7</sup>: H02H 3/16, 3/20, 7/20
- (21) International Application Number: PCT/SG02/00016
- (22) International Filing Date: 1 February 2002 (01.02.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US):  
HI-POWER SYSTEMS & INDUSTRIAL PTE LTD.  
[SG/SG]; 37 Jalan Bangsawan, Singapore 457813 (SG).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): AWYONG, Khim  
[SG/SG]; Blk 62, Sims Drive, #09-901, Singapore 380062 (SG).
- (74) Agent: AXIS INTELLECTUAL CAPITAL PTE LTD.;  
19B Duxton Hill, Singapore 089602 (SG).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ELECTRICITY SUPPLY OVER-VOLTAGE PROTECTION DEVICE

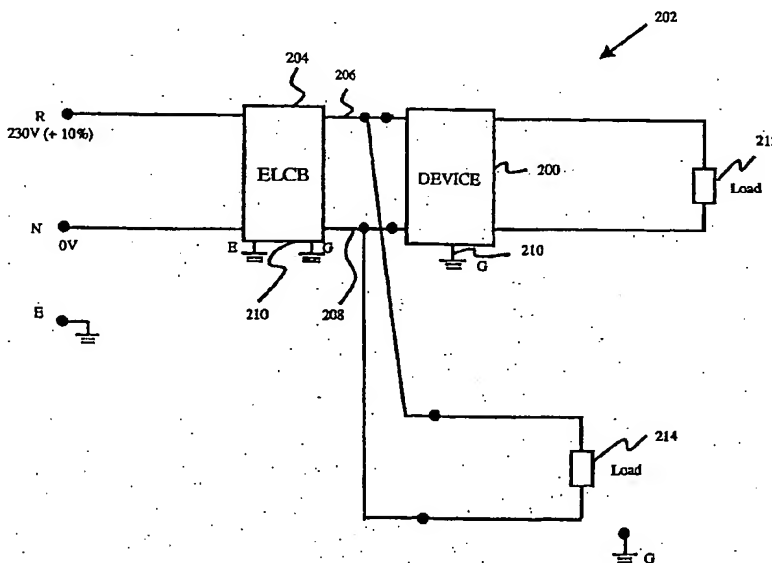

(57) Abstract: A device (200) connectable to live and neutral conductors (206, 208) providing electricity supply and to an earth connection (210) for detecting an electricity supply voltage level increase is disclosed. The device (200) includes a voltage increase detector (310) for detecting the electricity supply voltage level increase. The device (200) also includes an electric current diversion device (314) actuable upon detection by the voltage increase detector (310) for diverting an electric current from the electricity supply to the earth connection (210).

WO 03/065535 A1